


Industrial LED Message Display Solution for PLC, PC, Embedded system



LEDmsg protocol

RS232/485/TTL, Ethernet, WIFI, Bluetooth

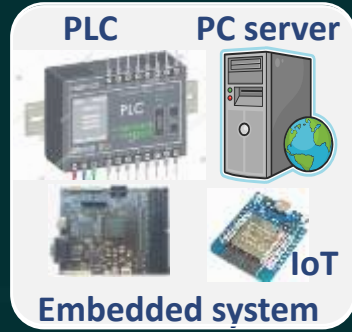

Simple, smart and reliable | real-time | multi-languages | distinct 7 colors | with background images and various effects


LMD Controller Manual (Model : LMD-C1-1S)

Contents

1. Composition	Page 2
2. Features	3
3. Specification	4
4. Dimension	5
5. Port Function Setup	6



If you have any questions regarding the contents of this manual, please contact "82-2-2272-5038 or LEDmsg01@gmail.com".

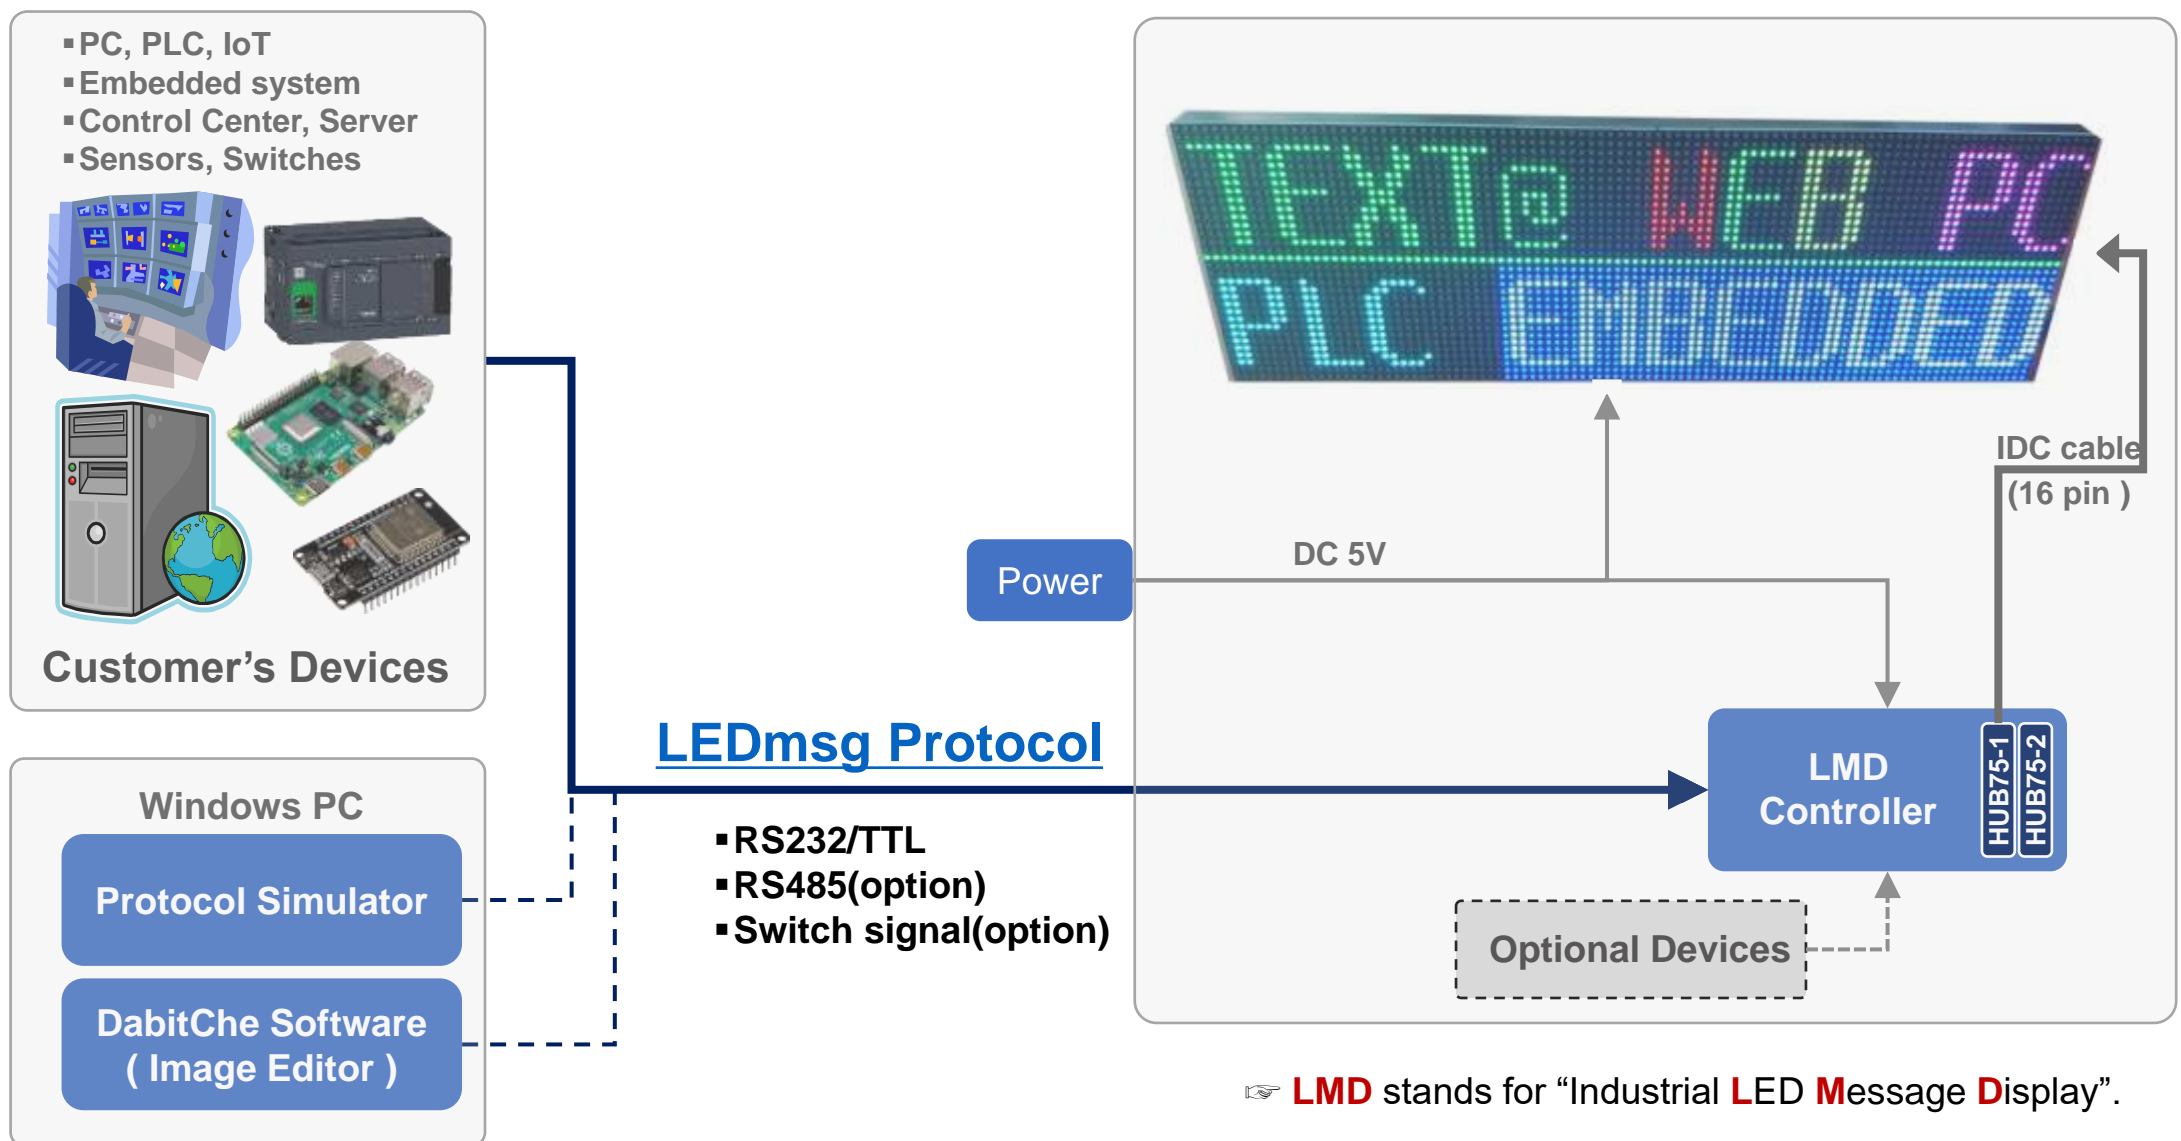


Components	Description																	
Customer's Devices	A customer's system or device that sends message data to display on the LED signboard It could be " PC, PLC, IoT, Embedded system, Control Center, Server, Sensors, Switches".																	
LMD Controller	<table border="1"> <thead> <tr> <th>Model</th> <th>Max. Screen Size (Row x Column)</th> <th>Communication Methods</th> <th>Display Contents</th> </tr> </thead> <tbody> <tr> <td>LMD-C1-1S</td> <td>2R x 16C or 1R x 32C</td> <td>RS232/TTL, RS485(option)</td> <td rowspan="4"> <ul style="list-style-type: none"> • Real Time Message • Page Messages (Stored Message) • Background Images (Text, Graphic, Animation) </td> </tr> <tr> <td>LMD-C1-1E</td> <td>2R x 16C or 1R x 32C</td> <td>RS232/TTL, Ethernet</td> </tr> <tr> <td>LMD-C2-1E</td> <td>4R x 20C or 2R x 40C</td> <td>RS232/TTL, Ethernet, RS485(option)</td> </tr> <tr> <td>LMD-C3-1S</td> <td>8R x 15C</td> <td>RS232/TTL, Ethernet/RS485(option)</td> </tr> </tbody> </table>	Model	Max. Screen Size (Row x Column)	Communication Methods	Display Contents	LMD-C1-1S	2R x 16C or 1R x 32C	RS232/TTL, RS485(option)	<ul style="list-style-type: none"> • Real Time Message • Page Messages (Stored Message) • Background Images (Text, Graphic, Animation) 	LMD-C1-1E	2R x 16C or 1R x 32C	RS232/TTL, Ethernet	LMD-C2-1E	4R x 20C or 2R x 40C	RS232/TTL, Ethernet, RS485(option)	LMD-C3-1S	8R x 15C	RS232/TTL, Ethernet/RS485(option)
Model	Max. Screen Size (Row x Column)	Communication Methods	Display Contents															
LMD-C1-1S	2R x 16C or 1R x 32C	RS232/TTL, RS485(option)	<ul style="list-style-type: none"> • Real Time Message • Page Messages (Stored Message) • Background Images (Text, Graphic, Animation) 															
LMD-C1-1E	2R x 16C or 1R x 32C	RS232/TTL, Ethernet																
LMD-C2-1E	4R x 20C or 2R x 40C	RS232/TTL, Ethernet, RS485(option)																
LMD-C3-1S	8R x 15C	RS232/TTL, Ethernet/RS485(option)																
Optional Devices	<p>This type of the controller can be used in connection with the devices below.</p> <ul style="list-style-type: none"> • Ethernet Converter • RS485 Converter • Switch IO Board to display the preset message • Brightness Control sensor • GPS Time receiver • Relay Output(2channel) • Temp./Humidity Sensor 																	
LED module	The LMD controller uses common HUB75E RGB 16x16 MATRIX LED modules produced in China. The display signal pattern of an LED module varies depending on the manufacturer and module type. Therefore, compatibility with the LMD controller must be tested according to "" Protocol Simulator Manual, A-7 How to set LED Display Signal ". Otherwise, we recommend using our company's verified " LMD LED modules ."																	
Power	DC5V shall be supplied to LMD controller and LED module.																	
Protocol Simulator	This runs on a Windows PC and can perform basic setup and protocol simulation of the LED signboard. For details, refer to " Dabit Protocol Simulator Manual "																	
DabitChe Software	By using DabitChe on Windows PC, you can create various image files, save them in one B.G Playlist(Max. 255) and upload them to the LMD controller. Then, you can call the file number and display it alone or use it as the background for a protocol message. For details, refer to " DABIT Software Manual, chapter 4 and attachment 6 "																	

A. Hardware

1. Built-in high-performance Dual Core CPU, enabling use of various ports and multi-communications
2. Various optional products available
 - 1) [Ethernet converter](#): To communicate with Ethernet devices
 - 2) [RS485 Converter](#): To communicate with RS485 devices
 - 3) [Switch IO Board](#):
To display the stored message by directly receiving switching signals from PLC, relays, switches, sensors.
 - 4) [Brightness Control sensor](#):
To automatically adjust the brightness of the LED screen according to the surrounding brightness.
As for the outdoor LED signboard, it has the effect of reducing power consumption, reducing glare, and increasing LED lifespan.
 - 5) [GPS Time receiver](#): To receive and update the accurate time data to the controller.
 - 6) [Relay Output\(2-channel\)](#): To control peripheral devices such as warning lights, buzzers, fans and guide bars.
 - 7) [Temp./Humidity Sensor](#): To display temperature or humidity
 - 8) USB/SD card socket: to increase the memory when necessary.
3. Since 2005, LMD solution has developed and proven in various industrial fields such Parking lots, subway/train/bus stations, terminals, airports, factories, roads, tunnels, stadiums, power plants, buildings, etc.
These days, LMD controllers is often used as a small, high-brightness, low-power high-LED display for drones, robots, and IOT devices due to its' **simple, economic and effective display performance.**


B. Software

1. The [LEDmsg protocol](#) is simple and highly scalable, so even beginners can easily apply it.
If you simply sketch the text or image you want to display on the LED signboard and send it to us, we will provide you with a sample packets of the corresponding message protocol.
2. There are various ways to display messages as follows.
 - 1) Send message protocol and display it in real time
 - 2) Send multiple message protocols and display them in page order
 - 3) Add a background image file number into the message protocol and display them together
3. There are various message display effects.
 - 1) Supports over 40 effects, including moving effects and text/background blinking.
 - 2) The screen can be divided into up to 4 sections, and individual message data can be transmitted and displayed with individual effects.
 - 3) Long messages can be displayed continuously up to 120 characters (240 English characters) by moving them to the left.
4. Through the DABIT Protocol Simulator, initial environment setup and message simulation can be easily performed.
5. You can create various image files with [DabitChe software](#) and save them on the LMD controller in advance, then import and display them directly or use them as background images for messages.

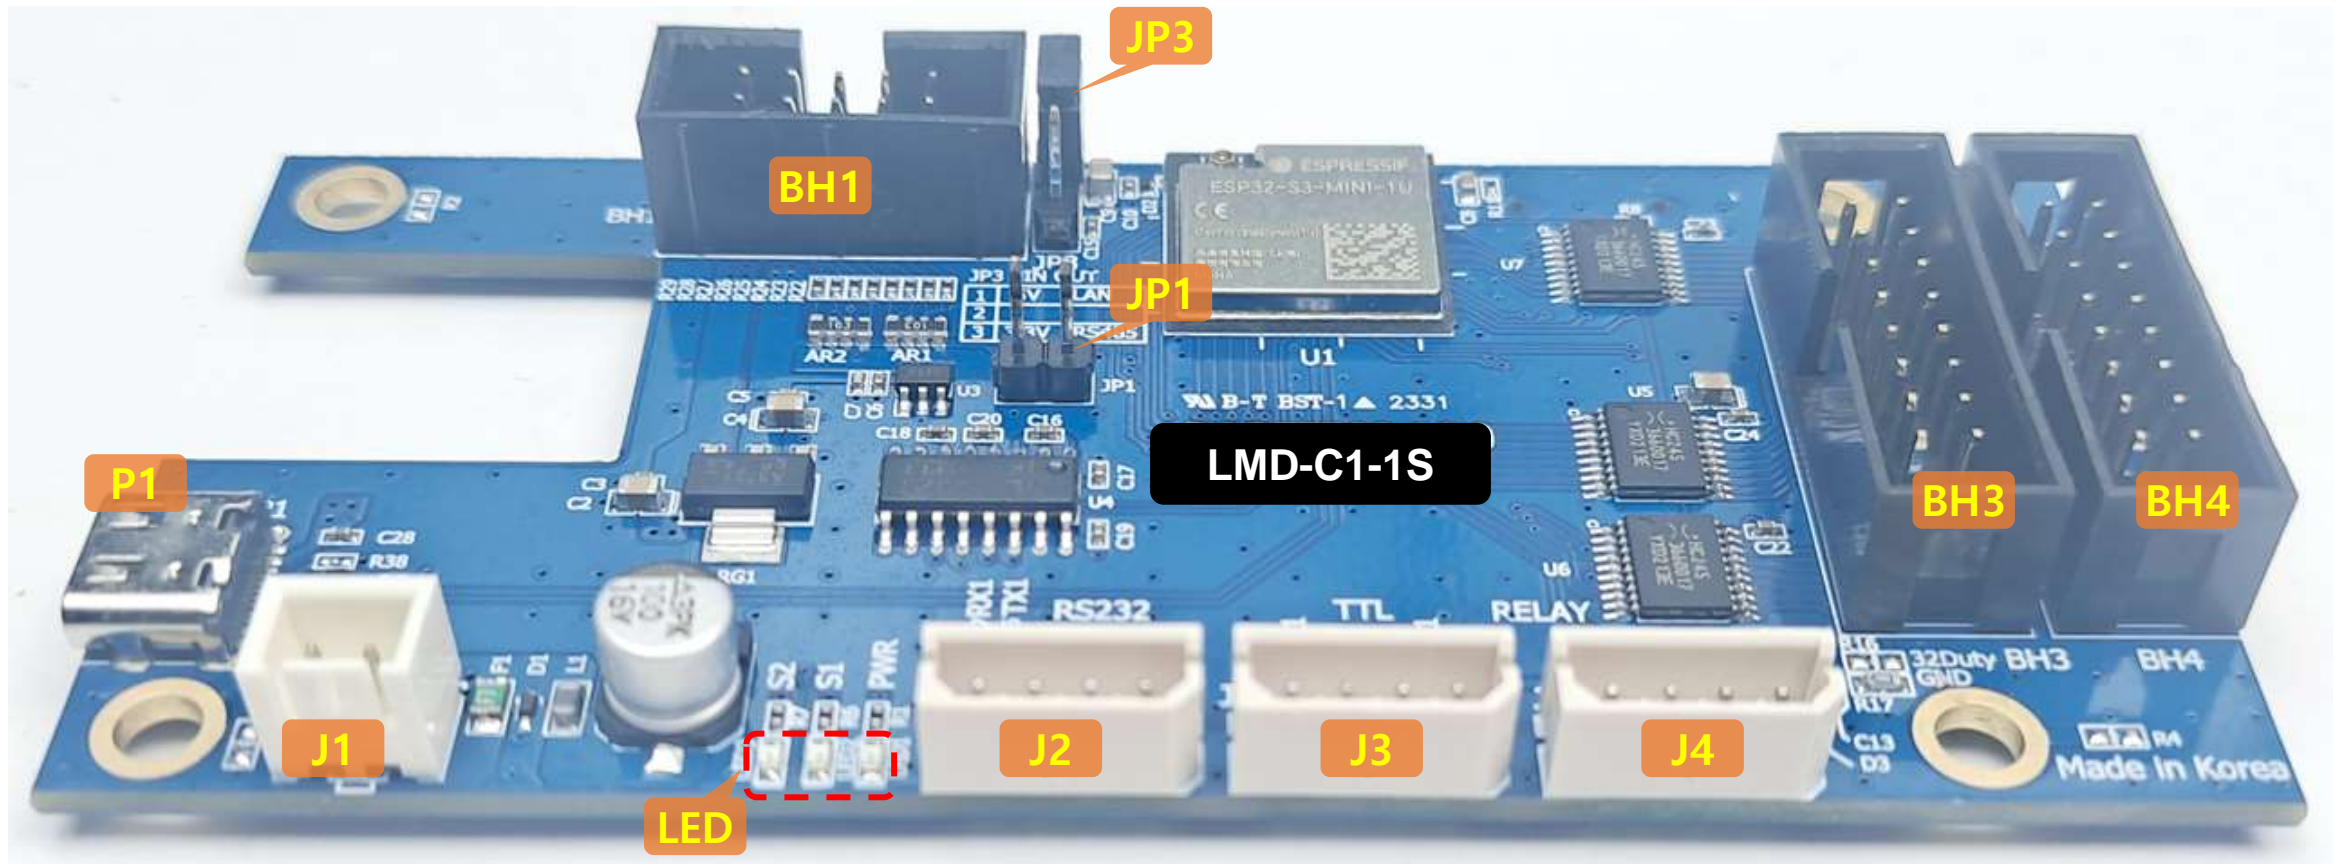

Port	Description	Port	Description
J1 (2-pin)	Power (DC5V, Max. 200mA)	BH1 (10-pin)	It is used for the following purposes. 1. Ethernet communication 2. RS485 communication 3. Switch IO Board to display preset message
J2 (4-pin)	RS232 Port (5V-TX-RX-GND) ☞ GPS Time receiver is connected here.	BH3 BH4 (16-pin)	These are the video signal output to LED screen - BH3(HUB75-1): Connect it to the 1 st row of the screen - BH4(HUB75-2) : Connect it to the 2 nd row of the screen
J3 (4-pin)	TTL Port (5V-TX-RX-GND) 1. TTL to Ethernet converter	JP (2/3-pin)	JP1 (2pin) : see Chapter " 5-D " JP3 (3pin, LAN-GND-RS485): see Chapter " 5-C " - Connect "LAN-GND" when using "BH1" for Ethernet. - Connect "GND-RS485" when using "BH1" for RS485.
J4 (4-pin)	It is used for the following purposes. 1. Relay output (2-channel, 5V-D2-D1-GND) 2. CdS sensor (right 2 pins ONLY) 3. Temperature/Humidity sensor	P1 (USB)	USB port(C type) to increase the memory when needed.
LED	PWR : Red LED lights up when power is applied. S1 : Green LED blinks when CPU is normal. S2 : Green LED blinks when the video output signal is normal.		

- Max. Screen Size(16x16 dot Matrix):
2-row x 16-column or 1-row x 32-columns, 4-row x 8-column(for special cases only)
- Display Image / Color : text, graphic and animation in **7 colors** (red, green, yellow, blue, pink, sky blue, white)
- Main Process : Xtensa® dual-core 32-bit LX7 microprocessor, up to 240 MHz
- Memory : 384 KB ROM, 512 KB SRAM, 8MByte Flash memory
- Scan rate : 1/32, 1/16, 1/8, 1/4
- Serial Port : RS-232 1, TTL 1, RS-485 1(option)
☞ 9,600/38,400/57,600/**115,200bps**, **N**(Parity check), **8**(Data bit), **1**(Stop bit)... **Default**
- Working temp. : -40°C ~ 85°C
- Power Consumption : DC5V, 150mA(Max.)

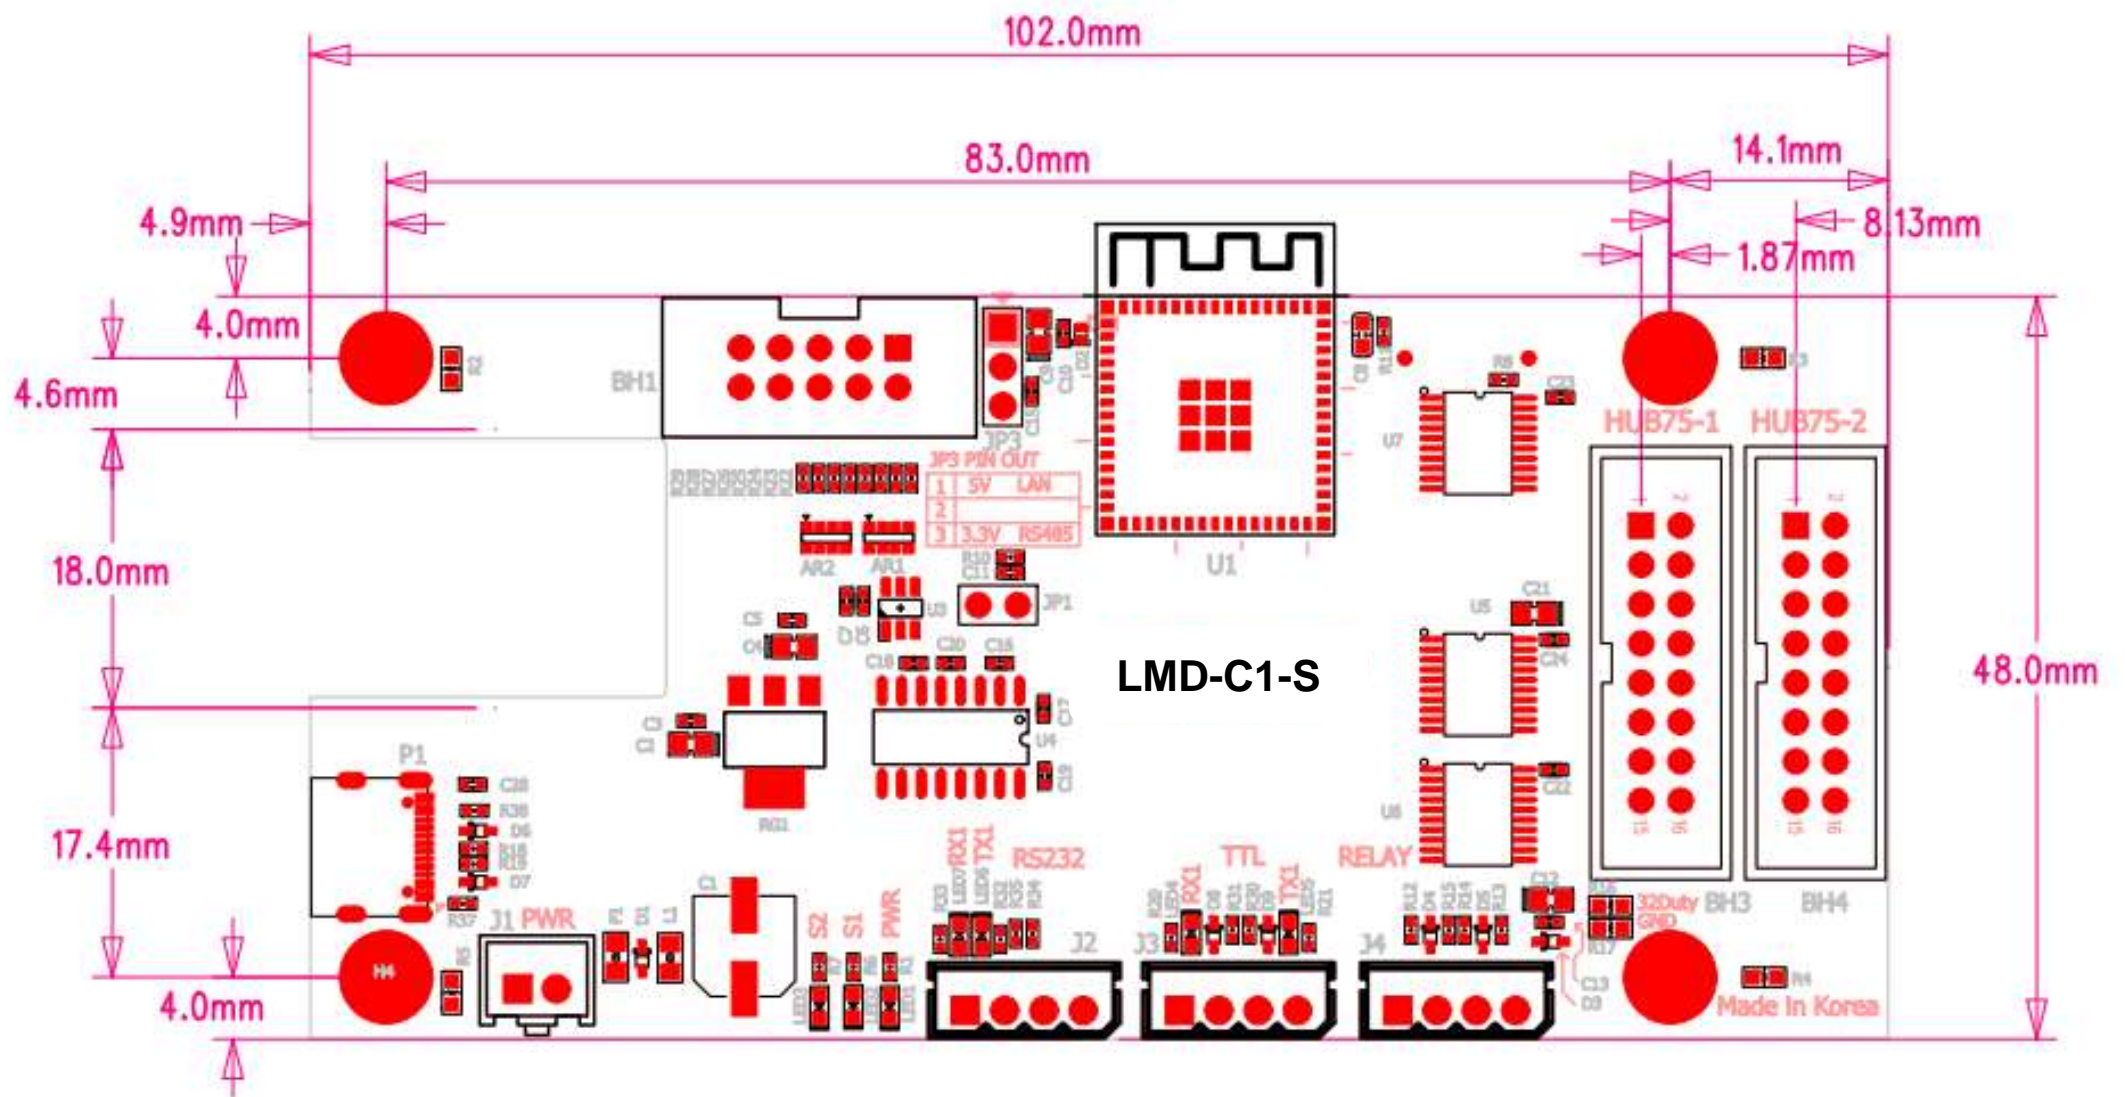

- 102(width) x 48(height) x 24(depth) mm
- Diameter of the holes(4) : 4mm

By referring to "[Dabit Simulator Manual, A-9](#)", you can set the functionality and baud rate of ports on LMD controller depending on your optional devices or requirement.

On the DABIT Protocol Simulator, click "Special Function > Board Functions" to open "Board Functions" setup window as shown on the right, and try the followings:

A. "J2(RS232), J3(TTL), J4(RS485)" Baud rate

The default is "115200bps" .

You can change it to "9600, 38400, 57600bps" to match your serial device baud rate according to "[Simulator Manual, A-9](#)."

B. "J4(4-pin)" function

The default is "Relay Signal Output" mode.

When you use "[CDS sensor](#)", you need to change it to "CDS" mode.

When you use "[SHT31 temperature & humidity sensor](#)", change it to "SHT31".

C. "BH1" function

The default is "TTL/RS485" mode.

When you use "[Switch IO Board](#)", change the mode to "8Pin Input(HEX)".

"J3" has 3 pins "LAN-GND-RS485".

- Connect "LAN-GND" when using "BH1" for [Ethernet](#).
- Connect "GND-RS485" when using "BH1" for [RS485](#).


D. "JP1" for Factory Reset

If you short-circuit "JP1" with a flat-blade screwdriver while the controller is powered on and then reset the power, the LMD controller will be factory reset.


After the Factory Reset, the above settings and all message data and image files are initialized.

However, the settings of "Screen size, Display signal type, Font file" are maintained.

For this job, you need to unscrew the fixing bolt & nuts and disassemble the upper board(LMD-S2E) and the lower board(LMD-C1-1S).

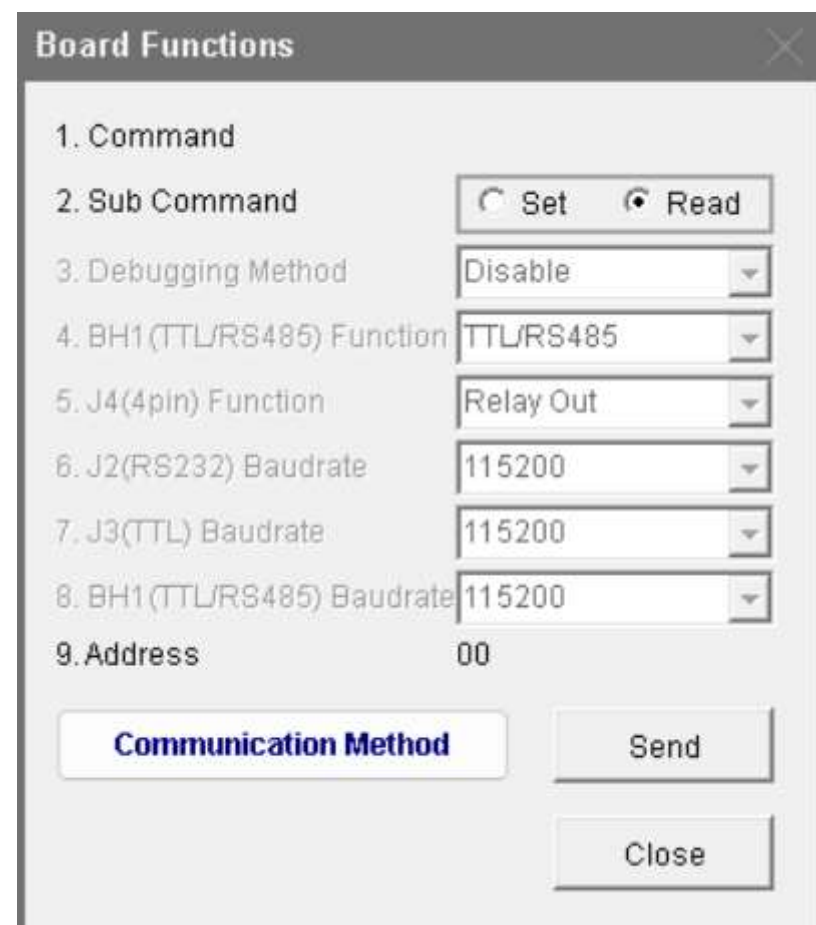

"Board Functions" setup window showing the default mode of the LMD controller

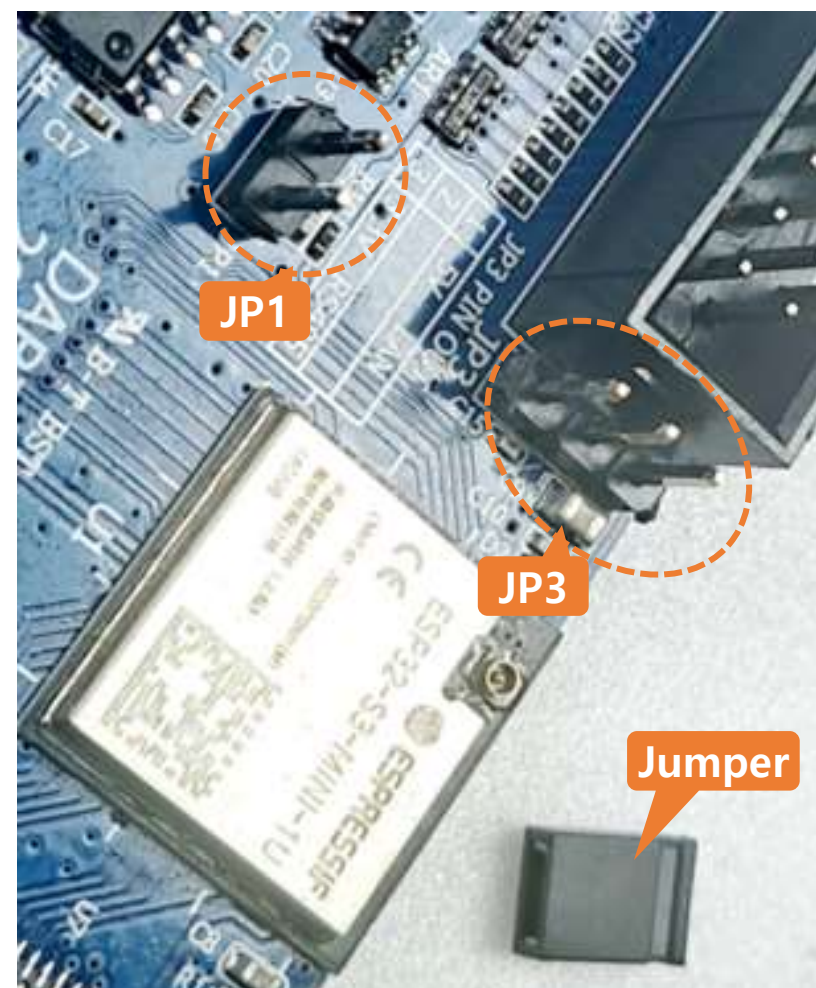

Jumper Pin and Jumper