


Specification of LED modules

Product : P6(3535)-16x32pixel-96x192-8S-outdoor	PN : LMD-P6-1R2C-8S-O
---	-----------------------

(1) Picture

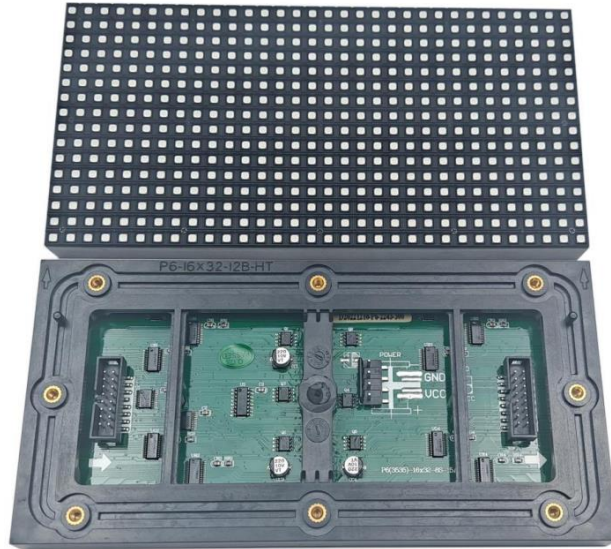


(2) LED SPEC.

No.	Item	Description
1	LED spec.	3In-1 3535 SMD LED
2	LED Pitch	6mm


(3) MODULE SPEC.

Size(Height x Width x Depth)	96 x 192 x 17mm
Pixels	16 x 32 dots
Density (dots/m ²)	27777 dots/m ²
Weight (Kg)	0.191kg
Brightness	≥6000cd/m ²
Connecter type	HUB75
Driving method	1/8 Scan
View angle	Horizontal: ≥140 degree , Vertical: ≥140 degree
Best view distance	8 ~ 16M
Color	R,G,B 4096Gray
Display color	4096*4096*4096
Life span	>8000 hours
Voltage	DC5V
Power consumption (Max.)	≤15 W/pc
Average power	≤7.5 W/pc (when displaying text only)
Power per 1m ² (Max.)	814 W/m ²
Average power per 1m ²	407 W/m ² (when displaying text only)
Working temperature	-20°C ~ 60°C
Working humidity	10% ~ 90%RH

(4) Pin map of the data connector

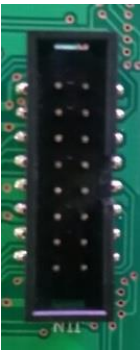Pin Map (J1)	Pin No.	Pin Name	Pin No.	Pin Name
	1	RD1	2	GD1
	3	BD1	4	GND
	5	RD2	6	GD2
	7	BD2	8	GND
	9	A	10	B
	11	C	12	P-ON-OUT,
	13	CLK	14	LATCH
	15	OE	16	GND

(5) Drawing of the frame

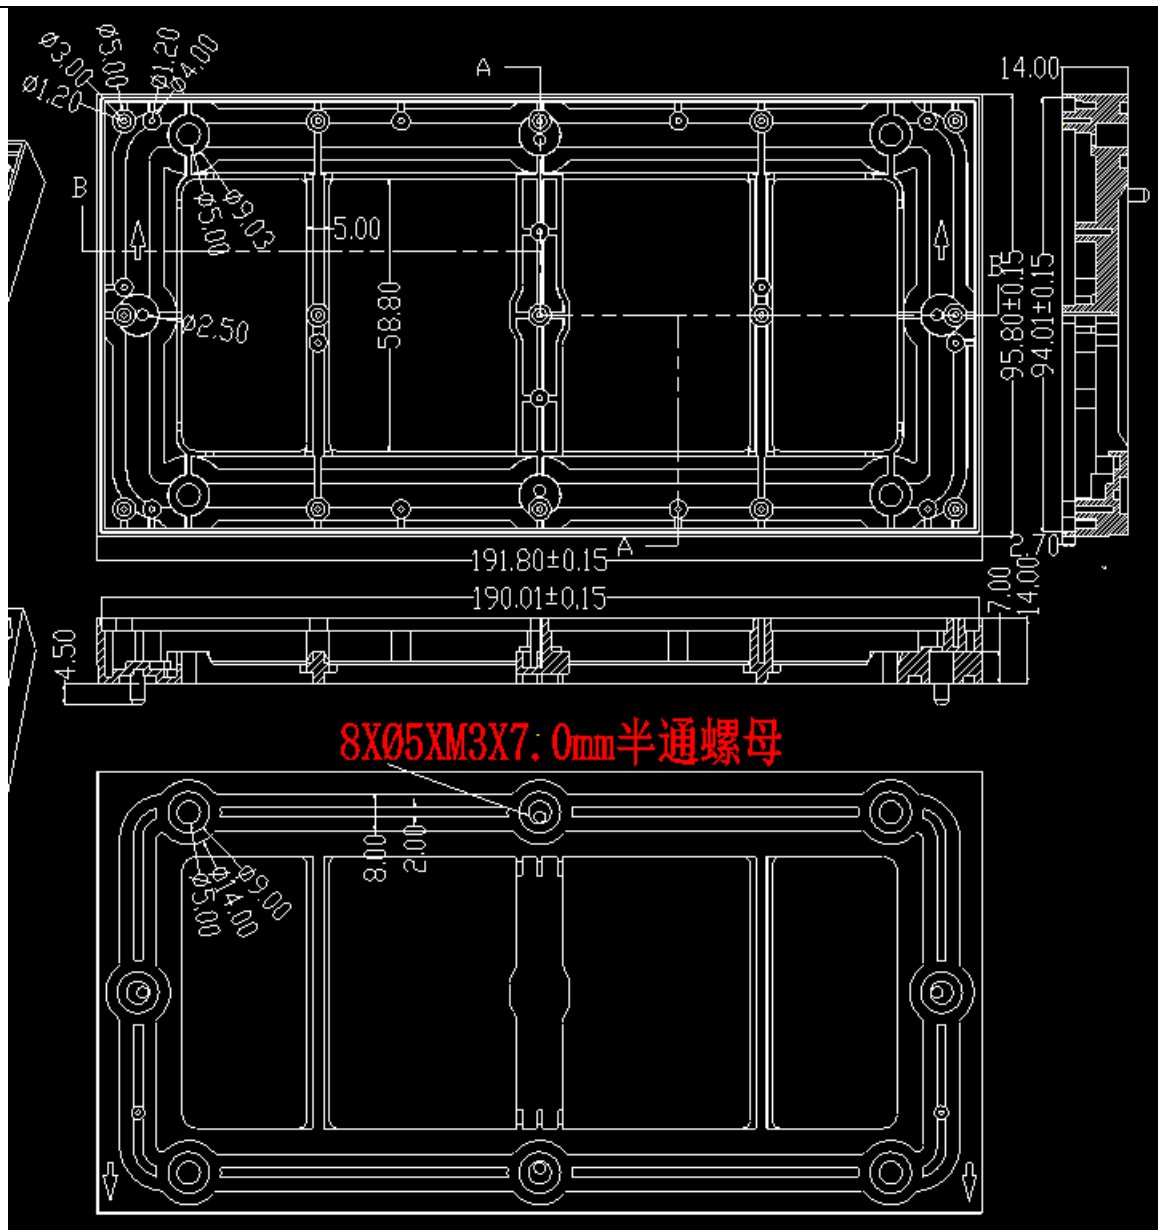

- Fixing screw : M4 x 8pcs
- Including parts: Power cable(4-pin), Data cable(16pin-18cm), Waterproof packing

☞ Display Signal Type: **08D-P16D2S31-9^1**, Color Order: **GBR**

Refer to "[Protocol Simulator Manual, A-7. How to set LED Display Signal](#)"